

SMBJ SERIES

Surface Mount Transient Voltage Suppressor

Features


- ★ Glass passivated chip
- ★ Low profile package
- ★ 600W peak pulse power capability at 10/1000 us waveform, repetition rate (duty cycle): 0.01%
- ★ Low leakage
- ★ Excellent clamping capability
- ★ Fast response time
- ★ RoHS compliant

Mechanical Data

- ★ Case: SMB/DO-214AA, Molded plastic has UL flammability classification 94V-0
- ★ Terminal: Solder plated, solderable per MIL-STD-750, Method 2026
- ★ Polarity: Cathode band denotes uni-directional device except bi-directional device

Working Voltage 5.0 to 440 V
Peak Pulse Power 600 Watts

SMB/DO-214AA

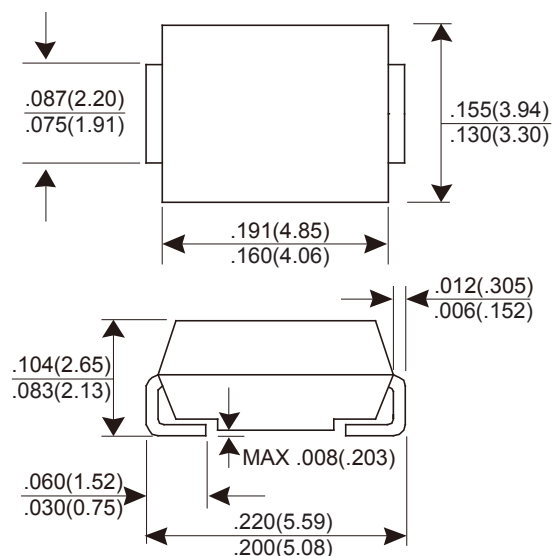

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

T_A= 25°C unless otherwise noted

PARAMETER	SYMBOL	VALUE	UNIT
Peak Pulse Power Dissipation at T _A =25°C by 10/1000μs waveform Fig.1 (Note 1,2)	P _{PPM}	600	W
Peak Forward Surge Current, 8.3ms single Half sine-wave super imposed on rated load (Note 3)	I _{FSM}	100	A
Steady State Power Dissipation at T _L =75°C	P _D	5.0	W
Maximum Instantaneous forward voltage at 50A for unidirectional devices only (Note 4)	V _F	3.5 / 5.0	V
Typical Thermal Resistance Junction to Ambient	R _{θJA}	100	°C/W
Typical Thermal Resistance Junction to Lead	R _{θJL}	20	°C/W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-65 to 150	°C

NOTES : (1) Non-repetitive current pulse, per Fig. 3 and derated above T_A=25°C per Fig. 2
 (2) Mounted on 0.2"x0.2"(5.0mmx5.0mm) copper pads to each terminal
 (3) Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle= 4 pulses per minute maximum
 (4) V_F<3.5V for V_{BR} 200V and V_F<5.0V for V_{BR} 201V

SMBJ SERIES

Electrical Characteristics($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Part Number (Uni)	Part Number (Bi)	Device Marking Code		Breakdown Voltage $V_{BR}@I_T$			Maximum Reverse Leakage $I_R@V_{RWM}$ (μA)	Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Surge Current I_{PP} (A)	Maximum Clamping Voltage $V_C@I_{PP}$ (V)
		Uni	Bi	Min(V)	Max(V)	$I_T(\text{mA})$				
SMBJ5.0A	SMBJ5.0CA	KE	AE	6.40	7.00	10	800	5.0	65.22	9.2
SMBJ6.0A	SMBJ6.0CA	KG	AG	6.67	7.37	10	800	6.0	58.25	10.3
SMBJ6.5A	SMBJ6.5CA	KK	AK	7.22	7.98	10	500	6.5	53.57	11.2
SMBJ7.0A	SMBJ7.0CA	KM	AM	7.78	8.60	10	200	7.0	50.00	12.0
SMBJ7.5A	SMBJ7.5CA	KP	AP	8.33	9.21	1	100	7.5	46.51	12.9
SMBJ8.0A	SMBJ8.0CA	KR	AR	8.89	9.83	1	50	8.0	44.12	13.6
SMBJ8.5A	SMBJ8.5CA	KT	AT	9.44	10.4	1	10	8.5	41.67	14.4
SMBJ9.0A	SMBJ9.0CA	KV	AV	10.0	11.1	1	5	9.0	38.96	15.4
SMBJ10A	SMBJ10CA	KX	AX	11.1	12.3	1	5	10	35.29	17.0
SMBJ11A	SMBJ11CA	KZ	AZ	12.2	13.5	1	1	11	32.97	18.2
SMBJ12A	SMBJ12CA	LE	BE	13.3	14.7	1	1	12	30.15	19.9
SMBJ13A	SMBJ13CA	LG	BG	14.4	15.9	1	1	13	27.91	21.5
SMBJ14A	SMBJ14CA	LK	BK	15.6	17.2	1	1	14	25.86	23.2
SMBJ15A	SMBJ15CA	LM	BM	16.7	18.5	1	1	15	24.59	24.4
SMBJ16A	SMBJ16CA	LP	BP	17.8	19.7	1	1	16	23.08	26.0
SMBJ17A	SMBJ17CA	LR	BR	18.9	20.9	1	1	17	21.74	27.6
SMBJ18A	SMBJ18CA	LT	BT	20.0	22.1	1	1	18	20.55	29.2
SMBJ20A	SMBJ20CA	LV	BV	22.2	24.5	1	1	20	18.52	32.4
SMBJ22A	SMBJ22CA	LX	BX	24.4	26.9	1	1	22	16.90	35.5
SMBJ24A	SMBJ24CA	LZ	BZ	26.7	29.5	1	1	24	15.42	38.9
SMBJ26A	SMBJ26CA	ME	CE	28.9	31.9	1	1	26	14.25	42.1
SMBJ28A	SMBJ28CA	MG	CG	31.1	34.4	1	1	28	13.22	45.4
SMBJ30A	SMBJ30CA	MK	CK	33.3	36.8	1	1	30	12.40	48.4
SMBJ33A	SMBJ33CA	MM	CM	36.7	40.6	1	1	33	11.26	53.3
SMBJ36A	SMBJ36CA	MP	CP	40.0	44.2	1	1	36	10.33	58.1
SMBJ40A	SMBJ40CA	MR	CR	44.4	49.1	1	1	40	9.30	64.5
SMBJ43A	SMBJ43CA	MT	CT	47.8	52.8	1	1	43	8.65	69.4
SMBJ45A	SMBJ45CA	MV	CV	50.0	55.3	1	1	45	8.25	72.7
SMBJ48A	SMBJ48CA	MX	CX	53.3	58.9	1	1	48	7.75	77.4
SMBJ51A	SMBJ51CA	MZ	CZ	56.7	62.7	1	1	51	7.28	82.4
SMBJ54A	SMBJ54CA	NE	DE	60.0	66.3	1	1	54	6.89	87.1
SMBJ58A	SMBJ58CA	NG	DG	64.4	71.2	1	1	58	6.41	93.6
SMBJ60A	SMBJ60CA	NK	DK	66.7	73.7	1	1	60	6.20	96.8
SMBJ64A	SMBJ64CA	NM	DM	71.1	78.6	1	1	64	5.83	103.0
SMBJ70A	SMBJ70CA	NP	DP	77.8	86.0	1	1	70	5.31	113.0
SMBJ75A	SMBJ75CA	NR	DR	83.3	92.1	1	1	75	4.96	121.0
SMBJ78A	SMBJ78CA	NT	DT	86.7	95.8	1	1	78	4.76	126.0
SMBJ85A	SMBJ85CA	NV	DV	94.4	104	1	1	85	4.38	137.0
SMBJ90A	SMBJ90CA	NX	DX	100	111	1	1	90	4.11	146.0
SMBJ100A	SMBJ100CA	NZ	DZ	111	123	1	1	100	3.70	162.0
SMBJ110A	SMBJ110CA	PE	EE	122	135	1	1	110	3.39	177.0
SMBJ120A	SMBJ120CA	PG	EG	133	147	1	1	120	3.11	193.0
SMBJ130A	SMBJ130CA	PK	EK	144	159	1	1	130	2.87	209.0
SMBJ150A	SMBJ150CA	PM	EM	167	185	1	1	150	2.47	243.0
SMBJ160A	SMBJ160CA	PP	EP	178	197	1	1	160	2.32	259.0
SMBJ170A	SMBJ170CA	PR	ER	189	209	1	1	170	2.18	275.0
SMBJ180A	SMBJ180CA	PT	ET	200	220	1	1	180	2.06	291.6
SMBJ200A	SMBJ200CA	PV	EV	224	247	1	1	200	1.85	324.0
SMBJ220A	SMBJ220CA	PX	EX	246	272	1	1	220	1.69	356.0
SMBJ250A	SMBJ250CA	PZ	EZ	279	309	1	1	250	1.48	405.0
SMBJ300A	SMBJ300CA	QE	FE	335	371	1	1	300	1.23	486.0
SMBJ350A	SMBJ350CA	QG	FG	391	432	1	1	350	1.06	567.0
SMBJ400A	SMBJ400CA	QK	FK	447	494	1	1	400	0.93	648.0
SMBJ440A	SMBJ440CA	QM	FM	492	543	1	1	440	0.84	713.0

Suffix C: Bi-Directional

For the bidirectional type having V_{RWM} of 10 volts and less, the I_R limit is doubled.

RATINGS AND CHARACTERISTICS CURVES SMBJ SERIES

FIG.1 - PEAK PULSE POWER RATING CURVE

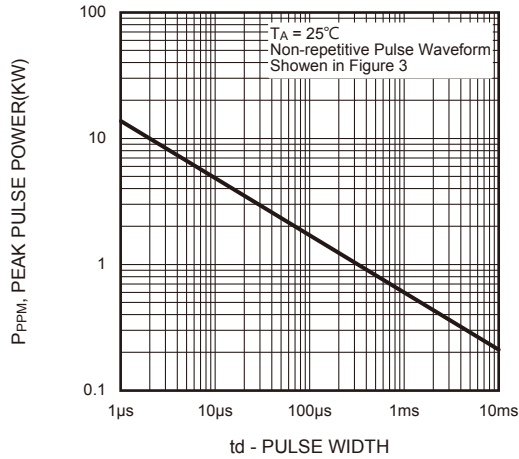


FIG.2 - PEAK PULSE POWER DERATING CURVE

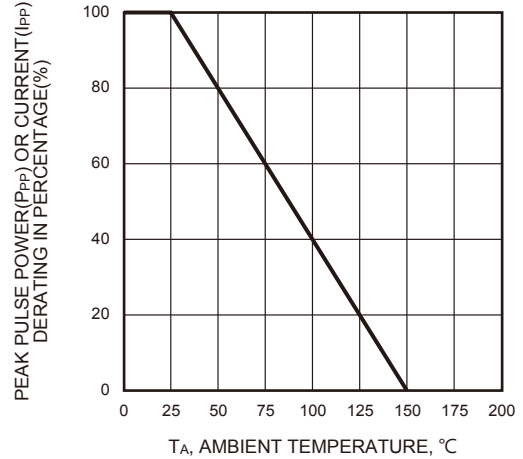


FIG.3 - PULSE WAVEFORM

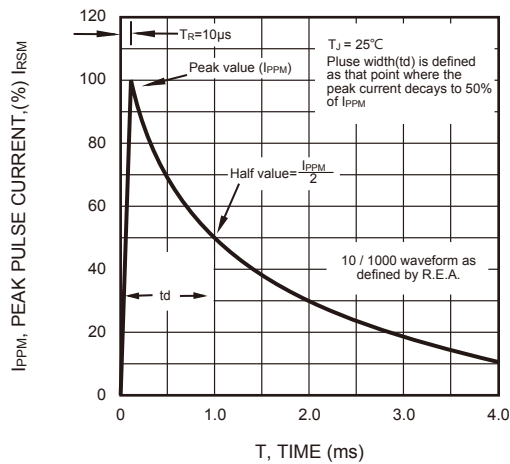


FIG.4 - TYPICAL JUNCTION CAPACITANCE

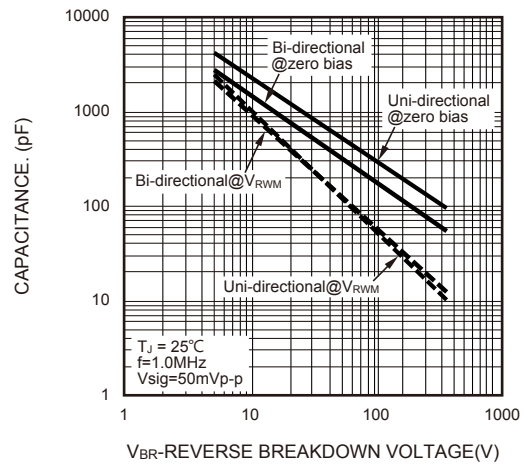


FIG.5 - STEADY STATE POWER DERATING CURVE

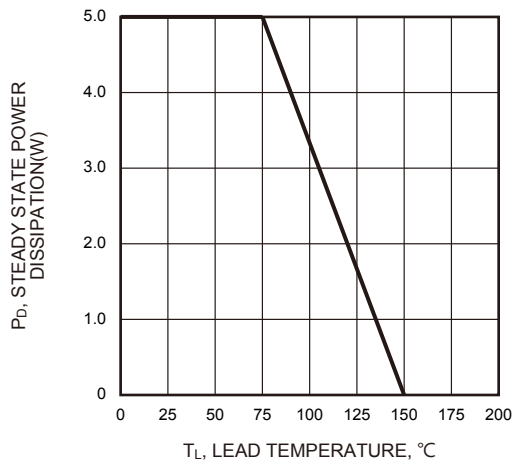


FIG.6 - MAXIMUM NON-REPETITIVE SURGE CURRENT

